


# Derprosa™ White DL Soft Touch®



derprosa.com  
ti-films.com

The original DL Soft Touch® effect,  
now in pure white opaque

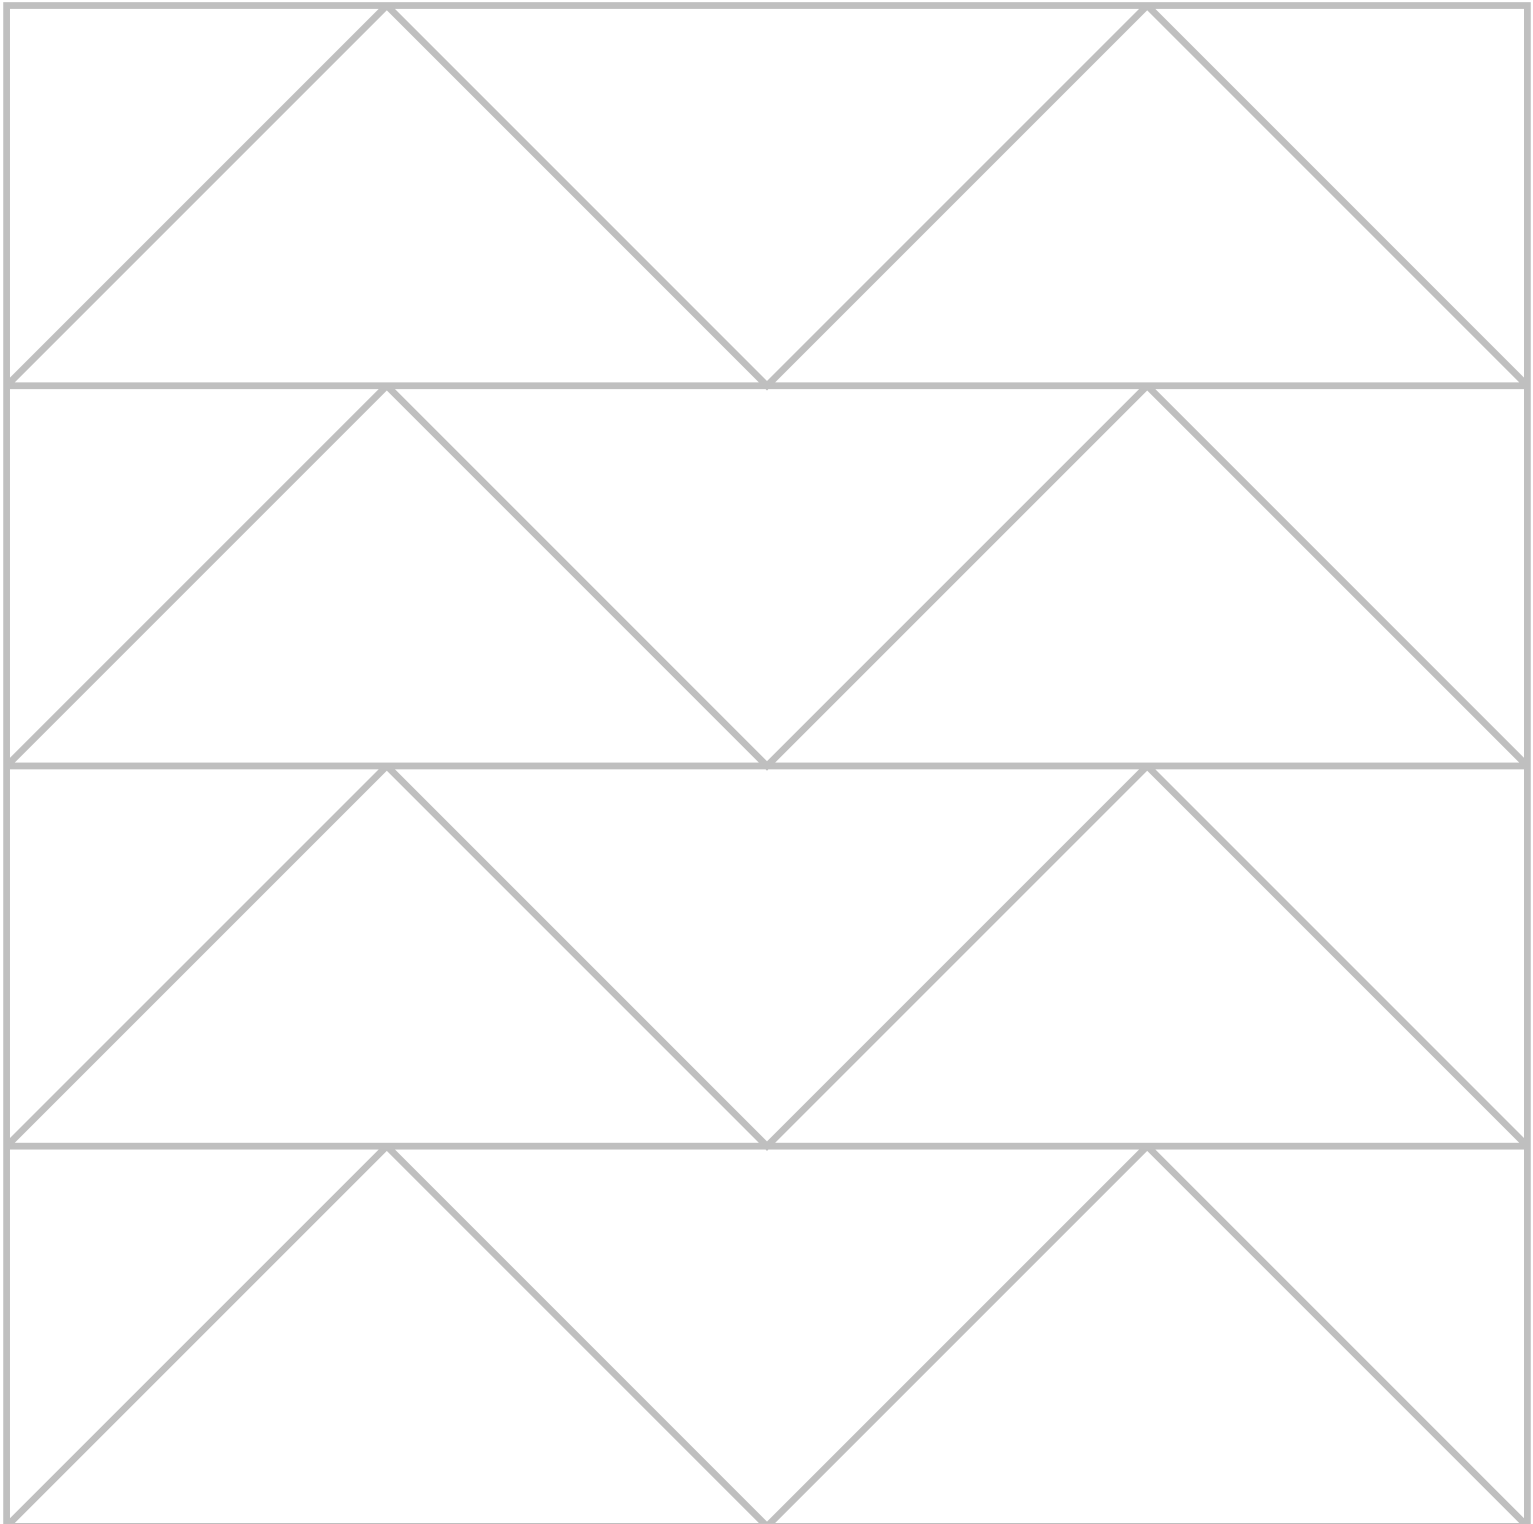












37W241 White DL Soft touch<sup>®</sup> Thermal

The original DL Soft Touch<sup>®</sup> effect, now in pure white opaque  
El efecto DL Soft Touch<sup>®</sup> original, ahora con el blanco opaco más puro

## Main features

### Características principales

BOPP BOPP	Opaque color printable Opaco color imprimible	Matte Mate	DL Soft touch <sup>®</sup> DL Soft touch <sup>®</sup>	Glueable Hot-Melt Colable Hot-Melt	Stampable standard Estampable básico	Printable Offset UVI Imprimible Offset UVI	Thermal Termo
							
				Screen printing varnish standard Barniz serigráfico básico	Digital varnish 3D standard Barniz digital 3D básico	Digital varnish 3D plus Barniz digital 3D plus	
							

## Special features

### Características destacadas

- \* Highly opaque DL Soft Touch<sup>®</sup> matte film with optimum whiteness
- \* Compatible with finishes such as spot UV or hot stamping
- \* Glueable, stampable and printable
- \* Printable by traditional offset with oxidative inks (specifically for non-porous materials), offset UV and screen printing
- \* *Film mate DL Soft Touch<sup>®</sup>, altamente opaco, con una blancura óptima*
- \* *Compatible con acabados como spot UV o hot stamping*
- \* *Colable, estampable e imprimible*
- \* *Imprimible por offset tradicional usando tintas oxidativas (específicas para materiales no porosos), offset UV y serigrafía*

## Typical applications

### Aplicaciones habituales

- \* Gift bags
- \* Book covers
- \* Brand labels for wines, spirits and premium drinks
- \* Catalogues for exclusive brands
- \* Luxury folding cartons such as perfumes, spirits, jewelry, luxury bags, etc
- \* *Bolsas de regalo*
- \* *Cubiertas de libros*
- \* *Etiquetas para vinos, bebidas espirituosas y premium*
- \* *Catálogos para marcas exclusivas*
- \* *Packaging de lujo como perfumes, bebidas espirituosas, joyería, bolsas de lujo, etc*

Properties Propiedades	Thermal	Units	Test method
	37W241	Unidades	Métodos de ensayo
Thickness Espesor	37	µm	-
	1.5	Mills	
Yield Rendimiento	27.4	m <sup>2</sup> /kg	Internal method Método interno
	19 273	ln <sup>2</sup> /Lb	
Light Transmission Transferencia de la Luz	≤ 20	%	ASTM D 2457 45°
Whiteness Blancura	≥ 90	mN/m	ASTM D 2578
Gloss Brillo	9	%	ASTM D 2457 45°
Dyne level Tensión superficial	40	mN/m	ASTM D 2578
Coefficient of friction Coeficiente de fricción	0.7	-	ASTM D 1894
Application temperature Temperatura de aplicación	95-115	°C	Internal method Método interno
	200-240	°F	
Lamination strength Fuerza de laminación	≥ 7.5	N/25.4mm	Internal method Método interno
	≥ 1.68	Lb/Inch	

The information provided above is based on Taghleef Industries S.L. conclusive tests and experience, which are indicative only and provided as guidelines. They do not constitute a guarantee of any specific product attributes or the suitability of products for any specific use, purpose or application. Thorough testing is recommended before running any lamination job.

La información proporcionada anteriormente se basa en las pruebas concluyentes y experiencia de Taghleef Industries S.L., que son solo indicativas y se proporcionan a título informativo únicamente. Esta información no constituye garantía de ningún atributo específico del producto o su idoneidad para un uso específico, propósito o aplicación. Se recomienda realizar pruebas exhaustivas antes de proceder con cualquier proceso de laminación.